



SU0121S02

SUBRA



PRODUCT FEATURES

Power usage	6 W
Power supply	24Vdc
Light source	LED
Electrical connection	Cable 3m (10ft)
Color temperature	5000 K, CRI 80
Luminous flux	485 lm
Efficiency	81 lm/W
Light beam angle	120°
Housing	Anodized aluminum
Front protection	Tempered satin glass
Protection index	IP69
Impact resistance	IK06
Operating temperature	-20 °C to + 45 °C (-04 °F to +113 °F)
Weight	0,35 kg (0,74 lb)
Agency approvals	CE, RoHS
Mounting	CLIP36, SUFX01

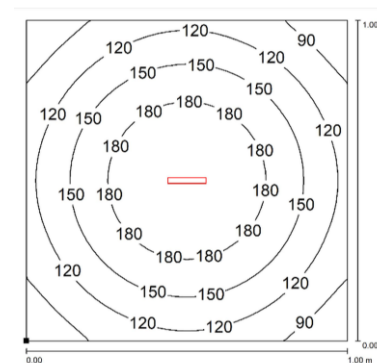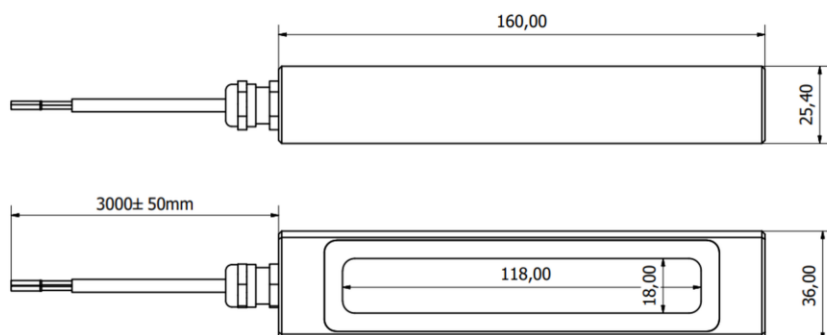

NOTE: Installation Height: 1m